

UC SERIES HARDMOUNT
WASHER-EXTRACTORS 20-80 LB



SEE US ABOUT IT TODAY.

UniMac



SERIOUS ABOUT LAUNDRY.

UC SERIES HARDMOUNT WASHER-EXTRACTORS 20-80 LB

As the leading manufacturer of on-premises laundry equipment, UniMac® offers more than 60 years of incomparable quality and long-lasting performance. Our UC series is built with unyielding construction to ensure industrial strength. Our cutting-edge innovations and technologies reduce costs and maximize throughput. And we're constantly improving. It's all part of our commitment to providing the lowest cost of ownership in the industry.

LOWER YOUR COSTS WITH UNIMAC

- Faster extraction technology spins up to 200 G-Force to remove more water during each load, resulting in shorter drying times and lower energy bills.
- Advanced Inverter Drive - proven technology and our proprietary design provide smooth, reliable power for optimal wash and extract performance. Unparalleled water and energy—saving you 33% in electricity versus previous models.
- Minimized sump design uses 11% less water while maintaining optimal cleaning.
- Patented Water Guardian leak detection reduces water consumption by detecting leaking fill or drain valves, identifying leaks before they cost your operation hundreds of dollars in wasted resources.

OUR COMMITMENT TO OPL

Our customers are the direct focus of every product we manufacture and every decision we make. We make sure every piece of UniMac equipment comes with peace of mind and the support you need to help your business succeed. We are with you every step of the way for:

- Support from a worldwide network of distributors and a team of trained technicians.
- Service Parts Availability.
- Service training certification for distributors through Alliance Laundry Systems University.

INDUSTRY-LEADING DURABILITY


The washer-extractor's heavy-duty computer-optimized frame is designed to stand up to the toughest laundry conditions. It's stronger than ever before, has a quieter operation and balances loads more efficiently.



Proudly based in Ripon, Wisconsin, USA, UniMac is dedicated to research, development and testing to provide equipment that delivers industrial strength and long-lasting quality. Our products undergo a 5-Stage Product Development Process and are pushed beyond their limits in our state-of-the-art test lab to ensure they exceed the toughest demands of the commercial environment and meet our customer's highest of standards.

BEST-IN-CLASS BEARING PROTECTION

UniMac® washer-extractors feature two close-tolerance ball bearings, permanently lubricated for trouble-free operation. Excluder seal and two triple-lip seals provide seven times the sealing power to isolate the bearings from water and chemicals.



THREE CONTROL OPTIONS

UniMac's flexibility is emphasized by the three levels of control available: M30, M9 and M4.

M30 Control – There are a total of 30 programs that you can modify to customize your laundry for specific needs.



Special features include cycle time remaining, temperature-controlled fill, cycle counter and test-cycle for diagnostics. Also features 30 programmable water levels to reduce water use. Easily programmed through control's infrared port.

M9 Control – Nine cycles that can be modified to meet your laundry's unique demands.



Three water levels and up to five supply signals for automated dispensing of laundry chemicals. Cycle counter and test-cycle for self-diagnostics.

M4 Control – Four-cycle control for laundries with light soil and limited selection of linens. Limited diagnostic test.




WORRY-FREE PERFORMANCE

For more than 60 years, UniMac laundry machines have set the industry standard for quality, durability and performance. A five-year warranty covers the frame, basket, shaft, bearings and seals from failure or breakage during normal operation due to defects in material or workmanship. A limited 3-year warranty is offered on all other parts.*

*Parts only, labor not included. See UniMac Warranty Bond for specifics.

UC SERIES – AT A GLANCE:

- Reduce dry-time and increase throughput with 200 G-Force extraction speed
- Computer-optimized frame design stronger than ever before with quieter operation
- Stainless steel top and front panel
- Three different control options (M30, M9 and M4) offer flexibility and enhanced laundry management
- Offered in five capacity options (20, 30, 40, 60 and 80 lb)
- Heavy-duty bearings and seals
- Engineered for quick trouble-shooting and ease of service
- Self-cleaning 4-compartment dispenser
- Large heavy-duty loading door
- Steam and electric water heating options

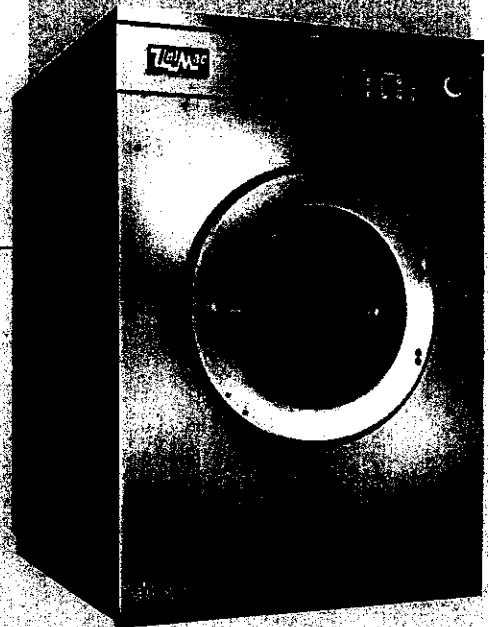

UC SERIES HARDMOUNT WASHER-EXTRACTORS 20-80 LB

SPECIFICATIONS		UC20	UC30	UC40	UC60	UC80	
Control Option		M4, M9, M30	M4, M9, M30	M4, M9, M30	M4, M9, M30	M4, M9, M30	
Capacity - lb (kg)		20 (9)	30 (13.6)	40 (18)	60 (27)	80 (36)	
Overall Width - in (mm)		26 (660)	29 (737)	30 5/8 (778)	34 3/16 (868)	41 1/2 (1054)	
Overall Depth - in (mm)		30 1/4 (767)	34 9/16 (878)	39 3/4 (1009)	42 9/16 (1081)	48 5/8 (1234)	
Overall Height - in (mm)		43 (1092)	45 (1143)	47 3/16 (1199)	49 7/8 (1267)	56 3/16 (1427)	
Cylinder Diameter - in (mm)		21 (533)	24 (610)	26 1/4 (667)	30 (762)	36 (914)	
Cylinder Depth - in (mm)		13 3/4 (349)	16 (406)	20 1/4 (514)	22 (559)	21 7/8 (555)	
Cylinder Volume - cu. ft. (liters)		2.76 (78.1)	4.19 (118)	6.34 (180)	9.0 (255)	12.88 (327)	
Door Opening Size - in (mm)		11 5/8 (295)	14 5/16 (364)	16 1/4 (413)	16 1/4 (413)	18 1/2 (470)	
Door Bottom to Floor - in (mm)		14 3/8 (365)	14 (356)	14 9/16 (370)	14 15/16 (379)	17 15/16 (455)	
Water Inlet Connection - in (mm)		2 @ 3/4 (19)	2 @ 3/4 (19)	2 @ 3/4 (19)	2 @ 3/4 (19)	2 @ 3/4 (19)	
Drain Diameter - in (mm)		1 @ 2 (51)	1 @ 2 (51)	1 @ 3 (76)	1 @ 3 (76)	1 @ 3 (76)	
Drain Height to Floor - in (mm)		4 11/16 (119)	4 1/8 (105)	4 1/2 (115)	4 7/8 (124)	6 3/8 (163)	
Motor Power Consumption - HP (kW)		1 (.75)	2 (1.5)	2 (1.5)	3 (2.2)	5 (3.7)	
Total # of Speeds		6, 9	6, 9	6, 9	6, 9	6, 9	
Cylinder Speeds - RPM (G-Force)		Gentle	37 (0.4)	34 (0.4)	33 (0.4)	31 (0.4)	28 (0.4)
		Wash	51 (.8)	48 (.8)	46 (.8)	43 (.8)	39 (.8)
		Distribution	92 (2.5)	86 (2.5)	82 (2.5)	77 (2.5)	70 (2.5)
		Very Low	301 (27)	282 (27)	269 (27)	252 (27)	230 (27)
		Low	518 (80)	485 (80)	464 (80)	434 (80)	396 (80)
		Medium	579 (100)	542 (100)	518 (100)	485 (100)	443 (100)
		High	648 (120)	606 (120)	579 (120)	542 (120)	495 (120)
		Very High	710 (150)	664 (150)	635 (150)	594 (150)	542 (150)
		Ultra High	819 (200)	766 (200)	733 (200)	686 (200)	626 (200)
Voltage wires/ Circuit Breaker - FLA	B	120/60/1	15-8	20-16	20-16	N/A	N/A
	X	200-208/220-240/50/60/3/1/3	15-4 (1 Ph) 15-3 (3 Ph)	15-6 (1 Ph) 15-4 (3 Ph)	15-7 (1 Ph) 15-4 (3 Ph)	15-10 (1 Ph) 15-6 (3 Ph)	15-12 (1 Ph) 15-8 (3 Ph)
	Q	200-208/220-240/50/60/3/3	15-3	15-4	15-4	15-6	15-8
	N	440-480/50/60/3/3	15-2	15-3	15-3	15-4	15-5
	P	380-415/50/60/3/3	15-2	15-3	15-3	15-4	15-5
Shipping Dimensions Approx. - in (mm)		Width	28 (711)	31 1/2 (800)	32 1/2 (826)	37 1/2 (953)	44 (1118)
		Depth	33 13/16 (859)	38 5/16 (973)	43 1/2 (1105)	46 15/16 (1191)	54 1/2 (1384)
		Height	49 3/8 (1256)	51 5/16 (1303)	53 5/8 (1361)	56 5/16 (1430)	58 5/8 (1488)
Net Weight - lb (kg)		335 (152)	460 (209)	550 (249)	695 (315)	1210 (549)	
Shipping Weight - lb (kg)		365 (166)	495 (225)	590 (268)	745 (338)	1260 (572)	
Stat Crate Shipping Weight - lb (kg)		450 (204)	590 (268)	690 (313)	860 (390)	1385 (628)	
*Agency Approvals		c.ETL _{us} , CE	c.ETL _{us} , CE	c.ETL _{us} , CE	c.ETL _{us} , CE	c.ETL _{us} , CE	



To learn more, or to find a distributor in your area, visit UNIMAC.COM
Alliance Laundry Systems - Shepard St, Ripon WI 54971 - 1.800.587.5458

* Agency approvals may vary depending on configuration.

Consult factory for details. Contact your distributor for specific models available with CE. For electrical specifications, circuit breaker requirements and full load amperages, see your authorized UniMac® distributor. Manufacturer strongly recommends using a circuit breaker instead of fuses. Use 3-pole circuit breakers for 3-phase machines. For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management systems at Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008.

© 2016 Alliance Laundry Systems LLC. Printed in the U.S.A.

UniMac

SERIOUS ABOUT LAUNDRY.

DISTRIBUTOR INFORMATION HERE

**COMMERCIAL EQUIPMENT COMPANY****DIVISION OF F.K.S. INC.**3241 TOWERWOOD DRIVE
FARMERS BRANCH, TEXAS 75234
972-991-WASH (9274) FAX 972-991-9278
www.washerdryer1.comQuotation
Sales Agreement

25729

Quote Date: 7/5/2018
Quote Expires: 8/4/2018

Since 1967

Acct #: CLA00005 Bill To: CLAY COUNTY SHERIFF OFFICE 215 WEST GILBERT STREET HENRIETTA, TX 76365 Contact: Christopher McRae Email: k.lemons@co.clay.tx.us Phone: (940) 636-0133 Fax: NONE	Ship To:
--	-----------------

Item Number	Description	Qty	Quote Price	Extended
UCT040FN0FXU40B000	WASHER EXTRACTOR - 40LB UniMac F Speed, 100g M4 Control, 4 Cycle - 5 Segment Micro Control with Cycle Selector Switch, 200-240V/50-60Hz/1 or 3 Phase	1.00	\$7,035.75	\$7,035.75
ACBF40X6X1	BASE 40# 1UN 6"	1.00	\$358.00	\$358.00
FREIGHT IN	FREIGHT IN	1.00	\$184.32	\$184.32
DELIVERY	DELIVERY	1.00	\$150.00	\$150.00
INSTALL	INSTALL CHARGES	1.00	\$623.10	\$623.10
INSTALLATION TO INCLUDED REMOVAL OF CURRENT EQUIPMENT (HAUL OFF IN REQUESTED) UN CRATE, ANCHOR, GROUT OF BASE AND WASHER EXTRACTOR. UTILTIY CONNECTIONS TO BE HANDLED BY OTHER LISCENSED PROFESSIONALS.				
Thank you for letting us earn your business!			Subtotal:	\$8,351.17
			Sales Tax:	\$0.00
			Quote Total:	\$8,351.17

Quote Notes:**On Premise and Coin-Operated Laundry Systems****"Our Reputation Won't Wash Out"**

Page 1 of 1

Sales Contract: Buyer's acceptance of this agreement acknowledges this to be a sales contract entered into at Dallas, Texas on the date specified hereon.

Quoted By ANORTHUP

Terms of Sale: COD/CASH ON DELIVERY

ACCEPTED COMMERCIAL EQUIPMENT COMPANY BY

AUTHORIZED BUYER'S SIGNATURE: _____

DATE: _____ TITLE: _____